

## Tiny

### T01P/T01E

### User Guide

#### USER GUIDE

#### ■ Instructions

##### • Check equipment before use

Check if the 6.35mm plug of the guitar cable is fully inserted into the tail of the guitar before use. Whether it is intact and whether each device is working properly.

##### • Use

Before inserting or removing the cable, you must turn down the volume knobs of each device to avoid noise when plugging and unplugging. When the cables are connected to various audio devices, adjust the volume knob to a suitable position.

The signal produced by the T01P pickup host is very weak, and usually requires an external amplifier preamp or equipment with a guitar interface to use. The special equipment can be a sound card with a guitar input interface, guitar effects, guitar sound, mixer, or Various audio equipment with guitar interface.

When the Tiny pickup is used in connection with the Tiny preamp first check whether the battery has power. When replacing the battery, do not connect the positive and negative terminals of the battery. The reverse connection time of more than 10 seconds may burn the preamp. When you are not using the guitar pickup for a long time, please unplug the guitar cable from the end of the guitar to turn off the power of the pickup and extend the battery life.

When finished, turn down the volume of all devices to the lowest level, and turn off the power of the devices. After all devices are powered off, unplug the audio cable to prevent the device from generating a lot of noise.

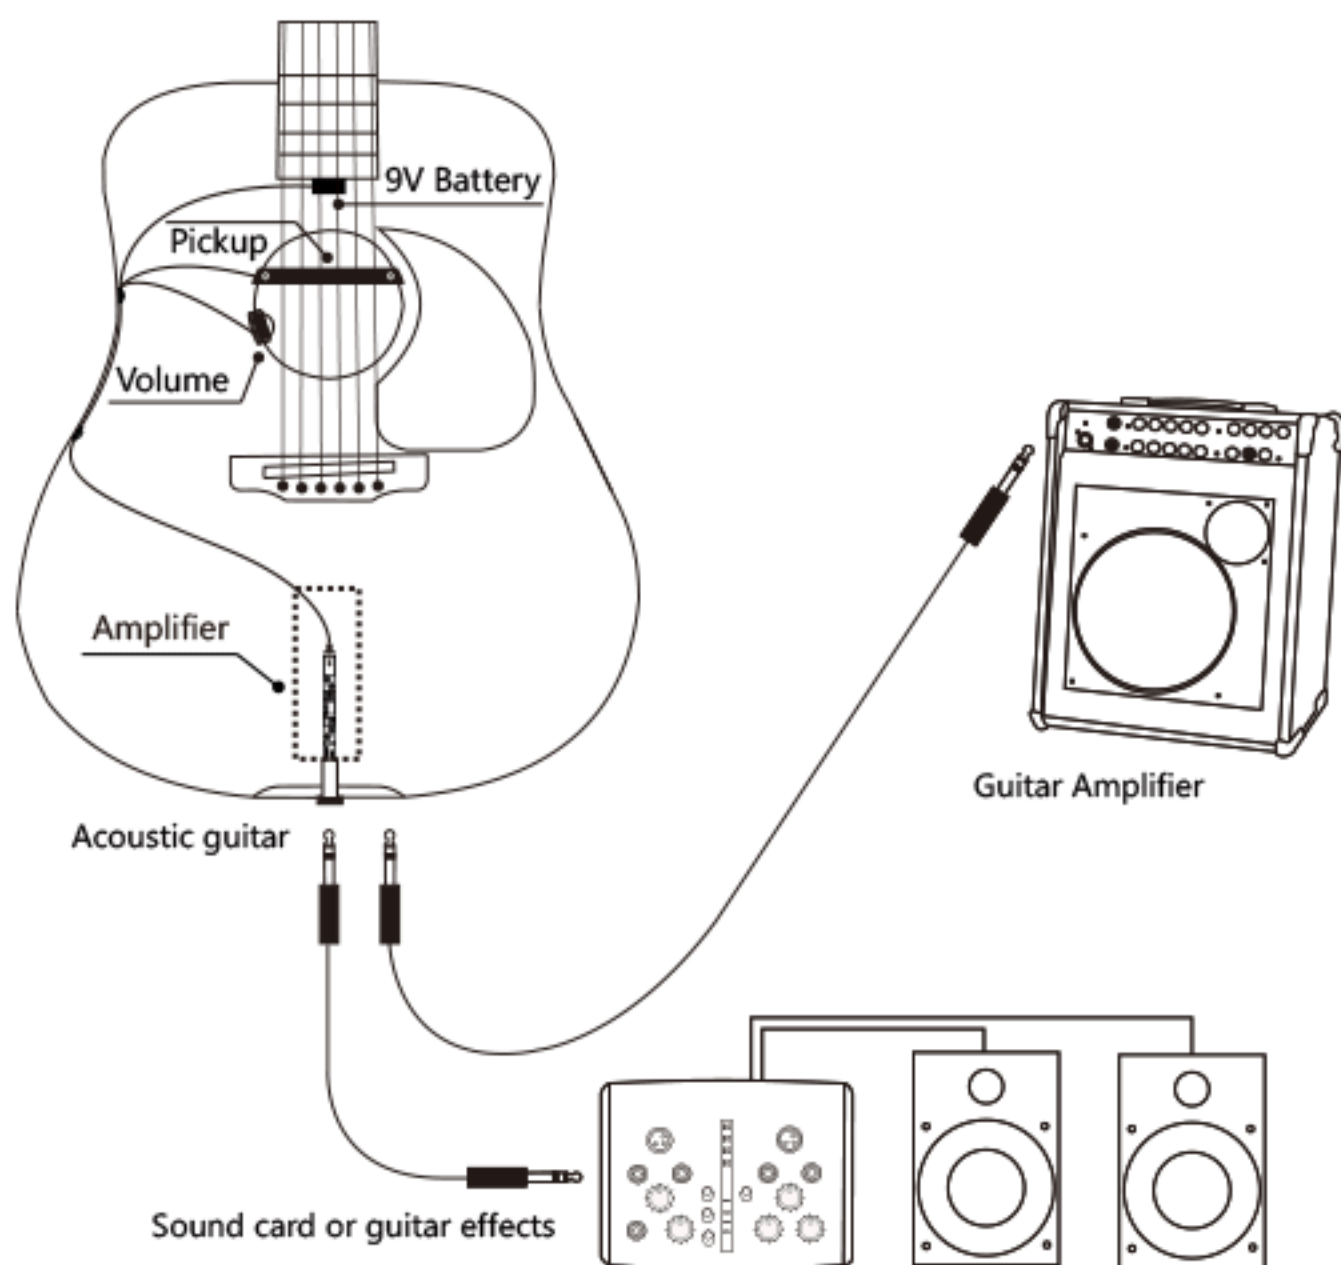


Fig.1

